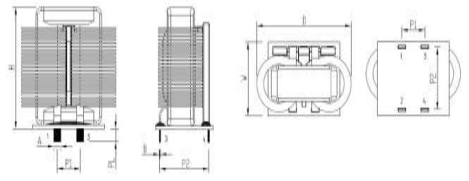
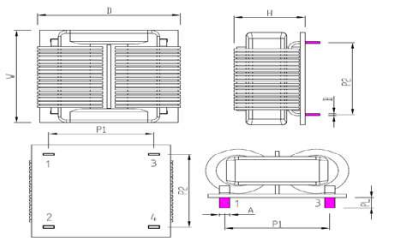


# 深圳市新胜果科技有限公司

扁平线共模电感 SQ32系列 (适用2150W Max.)											
型号	线径	匝数	材质	参考感量 (±30% mH) @1KHZ 0.3V	额定电压	额定电流 (无风冷, 无散热) 有散热条件可适当 调高额定电流	安装方式	脚距	DCR (mΩ)	推荐功率 W Max. 无风冷 (Input 90VAC)	产品图片
SQ3224A	0.7*2.5	27TS	7K	5.9	264 VAC Max.	11.0A @ 55°C 14.0A @ 25°C	立式	8*17	13 Max.	950W @ 55°C 1250W @ 25°C	
SQ3224B	0.8*2.5	23TS	7K	4.3		12.0A @ 55°C 16.0A @ 25°C	立式	8*17	10 Max.	1050W @ 55°C 1400W @ 25°C	
SQ3224C	0.5*2.4	37TS	7K	11.2		8.0A @ 55°C 10.0A @ 25°C	立式	8*17	26 Max.	720W @ 55°C 900W @ 25°C	
SQ3224D	1.0*2.5	19TS	7K	2.9		15.0A @ 55°C 19.0A @ 25°C	立式	8*17	6.5 Max.	1350W @ 55°C 1700W @ 25°C	
SQ3224E	0.8*2.5	23TS	7K	4.3		12.0A @ 55°C 16.0A @ 25°C	卧式	25*25	13 Max.	1050W @ 55°C 1400W @ 25°C	
SQ3224E-1	0.8*2.5	23TS	7K	4.3		12.0A @ 55°C 16.0A @ 25°C	卧式	29.8*24.9	13 Max.	1050W @ 55°C 1400W @ 25°C	
SQ3224F	0.7*2.5	27TS	7K	5.9		11.0A @ 55°C 14.0A @ 25°C	卧式	29.8*24.9	13 Max.	950W @ 55°C 1250W @ 25°C	
SQ3224G	1.0*2.5	19TS	7K	2.9		15.0A @ 55°C 19.0A @ 25°C	卧式	29.3*24.2	6.5 Max.	1350W @ 55°C 1700W @ 25°C	
SQ3224H	1.1*2.5	17TS	7K	2.4		20.0A @ 55°C 24.0A @ 25°C	立式	8*17	5 Max.	1800W @ 55°C 2340W @ 25°C	
SQ3224I	1.1*2.5	17TS	7K	2.4		20.0A @ 55°C 24.0A @ 25°C	卧式	29.3*24.2	5 Max.	1800W @ 55°C 2150W @ 25°C	
SQ3224J	1.3*2.5	15TS	7K	1.8		21.5A @ 55°C 26.0A @ 25°C	立式	8*17	5 Max.	1900W @ 55°C 2340W @ 25°C	
SQ3224K	0.5*2.4	36TS	7K	10.5		8.0A @ 55°C 10.0A @ 25°C	卧式	29.8*24.9	26 Max.	1800W @ 55°C 2150W @ 25°C	
SQ3224L	1.3*2.5	15TS	7K	1.8		21.5A @ 55°C 26.0A @ 25°C	卧式	29.3*24.2	5 Max.	1800W @ 55°C 2150W @ 25°C	

规格尺寸描述(单位: mm)								产品尺寸图
型号	H(Max.)	D(Max.)	W(Max.)	P1±0.3	P2±0.3	PL±0.5	φ	
SQ3224A	34	35	21.5	8	17	3.5	0.8 * 2.6	
SQ3224B	34	34	21.5	8	17	3.5	0.9 * 2.6	
SQ3224C	34	35	21.5	8	17	3.5	0.6 * 2.5	
SQ3224D	34	35	21.5	8	17	3.5	1.1 * 2.6	
SQ3224H	34	35	21.5	8	17	3.5	1.2 * 2.6	
SQ3224E	19.5	35	34	25	25	3.5	0.9 * 2.6	
SQ3224E-1	19.5	35	34	*	*	3.5	0.9 * 2.6	
SQ3224F	19.5	35	34	*	*	3.5	0.8 * 2.6	
SQ3224G	19.5	35	34	*	*	3.5	1.1 * 2.6	
SQ3224I	19.5	35	34	*	*	3.5	1.2 * 2.6	
								定制款


### 温升参考曲线 (I-T曲线)

型号	环境温度25℃	环境温度55℃
SQ3224A SQ3224F		
SQ3224B SQ3224E		
SQ3224C		


SQ3224D SQ3224G		
SQ3224H SQ3224I		

## 插损特性


SQ3224A ; SQ3224F

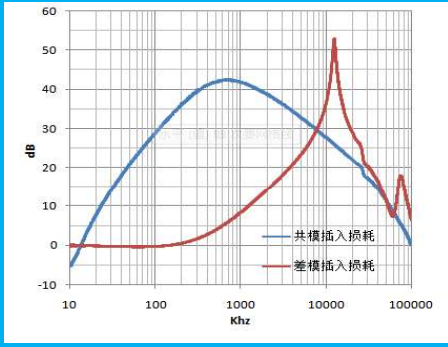


SQ3224B ; SQ3224E

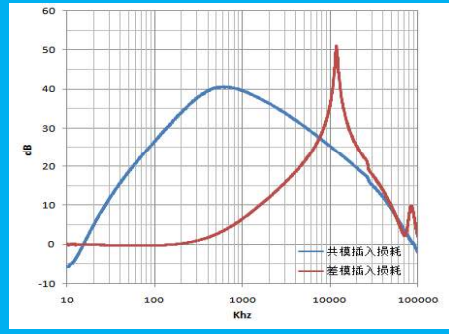


SQ3224C

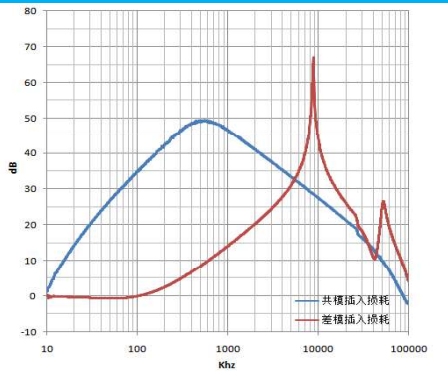

SQ3224D ; SQ3224G

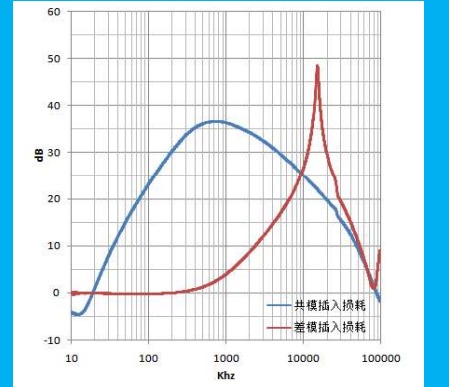

SQ3224H ; SQ3224I

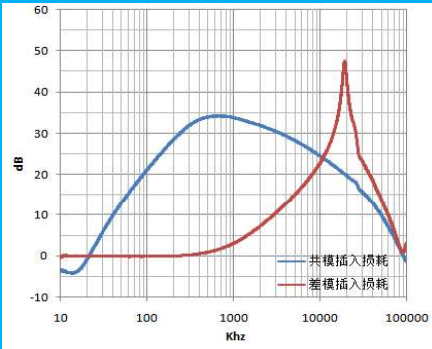

备注： 以上所有数据仅供参考，请以具体承认书为准